



# PRIKLJUČCI CAMLOCK A ZA ŽBUKANJE

Radni tlak: 50 bara

VRSTA	OZNAKA	MATERIJAL / BRTVA
<b>Utičnice sa nogicom</b>		
	<b>F - NP</b>	<b>Temper ljev / NBR guma</b>
CAMLOCK A NV35	F - NP 25	(1 ručka)
CAMLOCK A NV41	F - NP 25	
CAMLOCK A NV50	F - NP 35	
CAMLOCK A NV63	F - NP 50	
<b>Utičnica sa vanjskim navojem</b>		
	<b>F - G R</b>	<b>Temper ljev / NBR guma</b>
CAMLOCK A NV63	F - G R2.1/2"	
<b>Utičnice s unutarnjim navojem</b>		
	<b>F - U R</b>	<b>Temper ljev / NBR guma</b>
CAMLOCK A NV35	F - U R1"	(1 ručka)
CAMLOCK A NV41	F - U R1"	
CAMLOCK A NV50	F - U R1"	
CAMLOCK A NV50	F - U R1.1/4"	
CAMLOCK A NV50	F - U R1.1/2"	
CAMLOCK A NV63	F - U R2"	
<b>Utikači sa nogicom</b>		
	<b>M - NP</b>	<b>Pocinčani čelik</b>
CAMLOCK A NV35	M - NP 25	
CAMLOCK A NV41	M - NP 25	
CAMLOCK A NV50	M - NP 35	
CAMLOCK A NV63	M - NP 50	
<b>Utikači s unutarnjim navojem</b>		
	<b>M - U R</b>	<b>Pocinčani čelik</b>
CAMLOCK A NV35	M - U R1"	
CAMLOCK A NV41	M - U R1"	
CAMLOCK A NV41	M - U R1.1/4"	
CAMLOCK A NV50	M - U R1"	
CAMLOCK A NV50	M - U R1.1/4"	
CAMLOCK A NV50	M - U R1.1/2"	
CAMLOCK A NV63	M - U R2"	
CAMLOCK A NV63	M - U R2.1/2"	

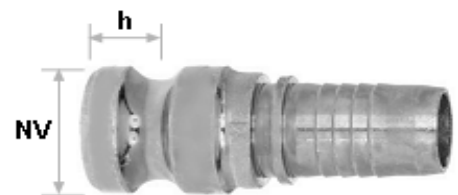

- Napomene:**
- Kod ovih se priključaka pod nazivnom veličinom NV podrazumijeva promjer glave utikača.
  - Razmak **h = 22 mm** (utičnice i utikači CAMLOCK AM nazivnih veličina 50 i 63 imaju razmak  $h = 23,5$  mm)